












© 2016

BEAM trunk configuration Instruction Manual

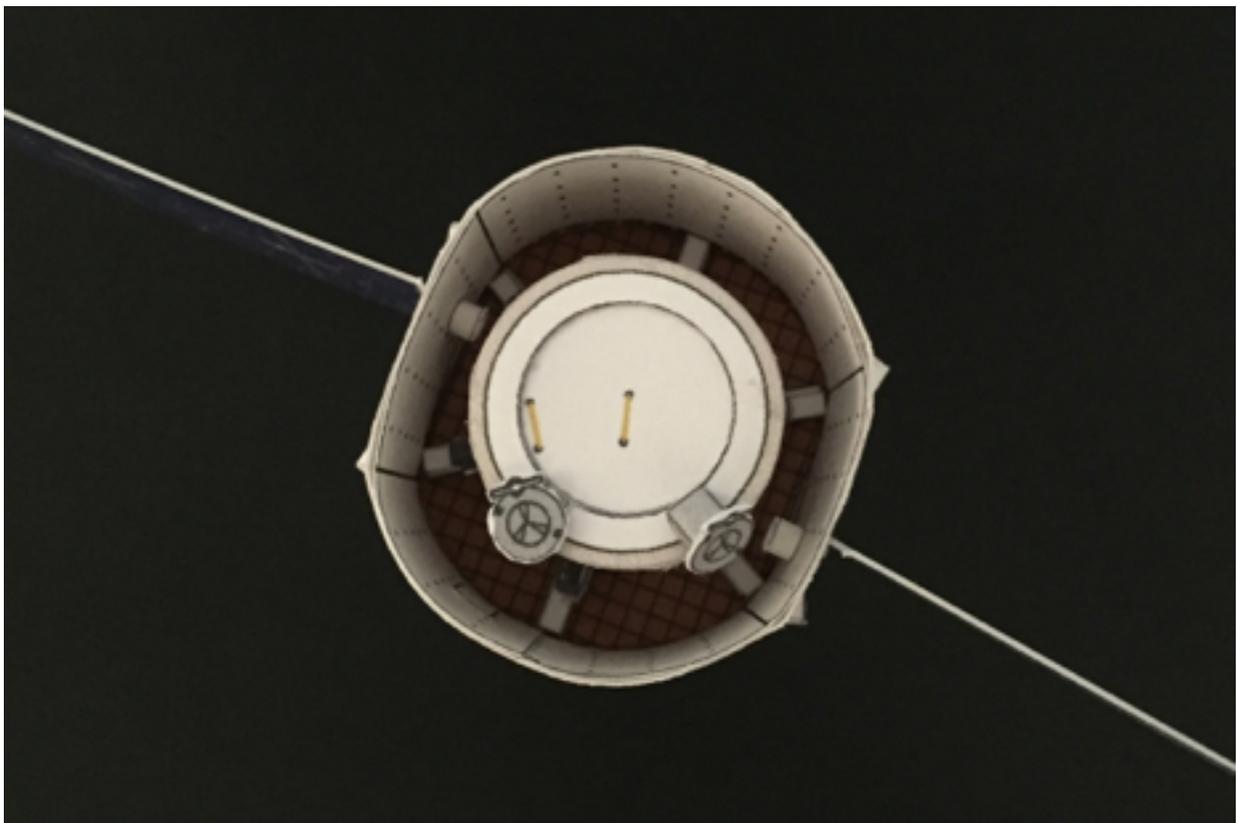



BEAM's body assembly

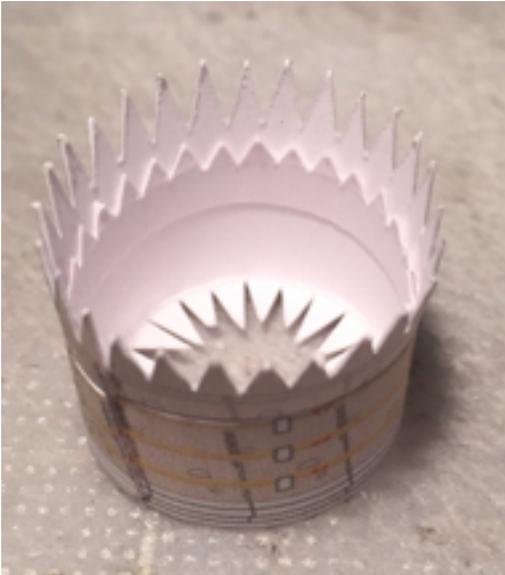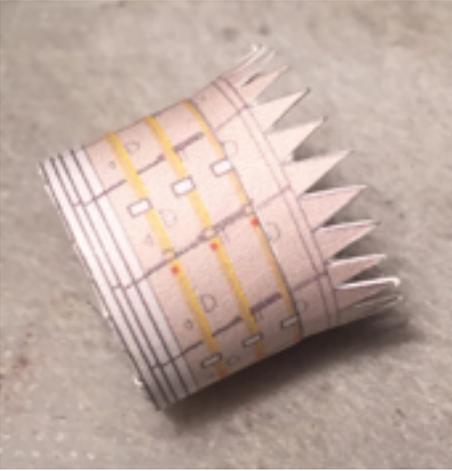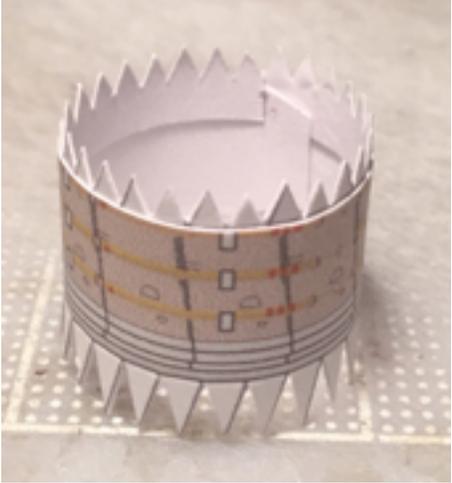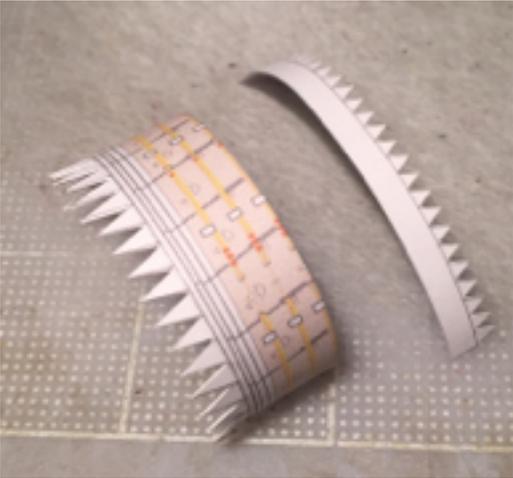

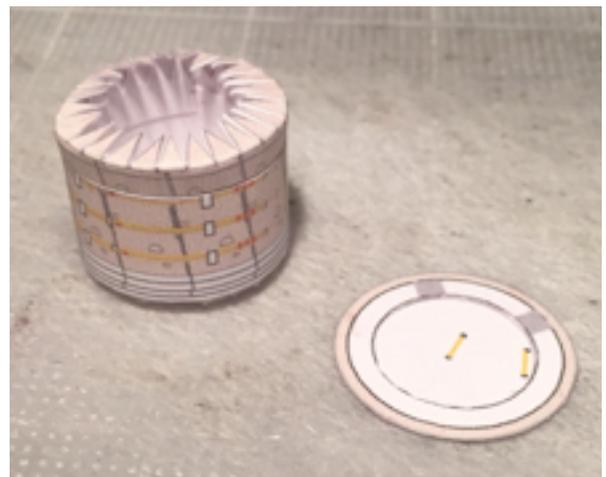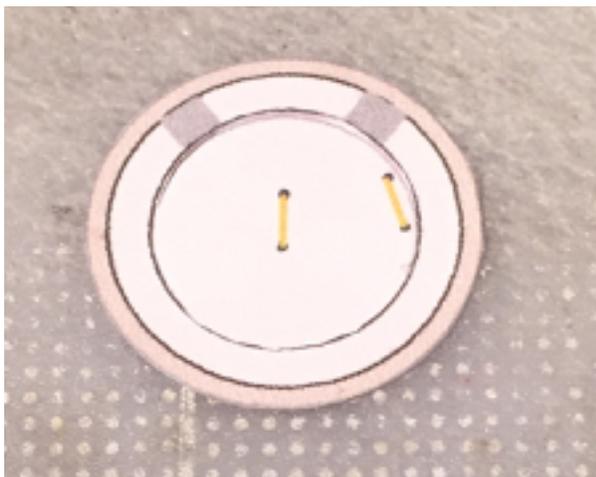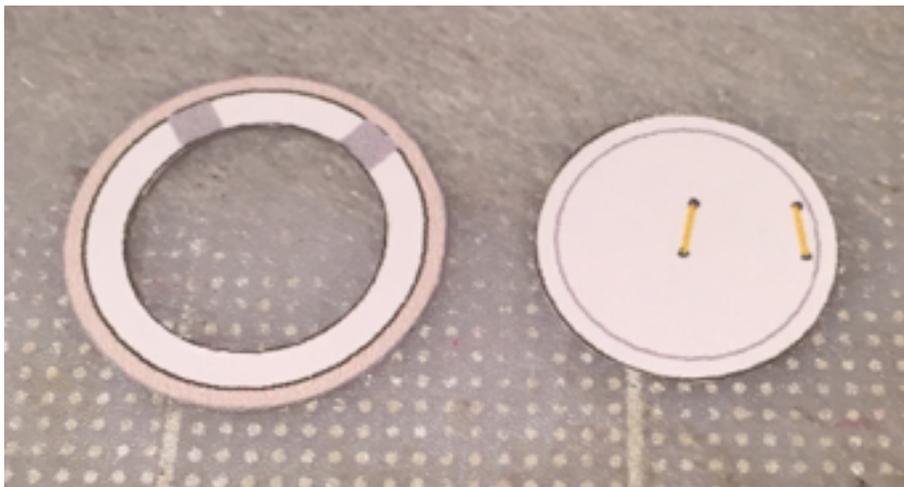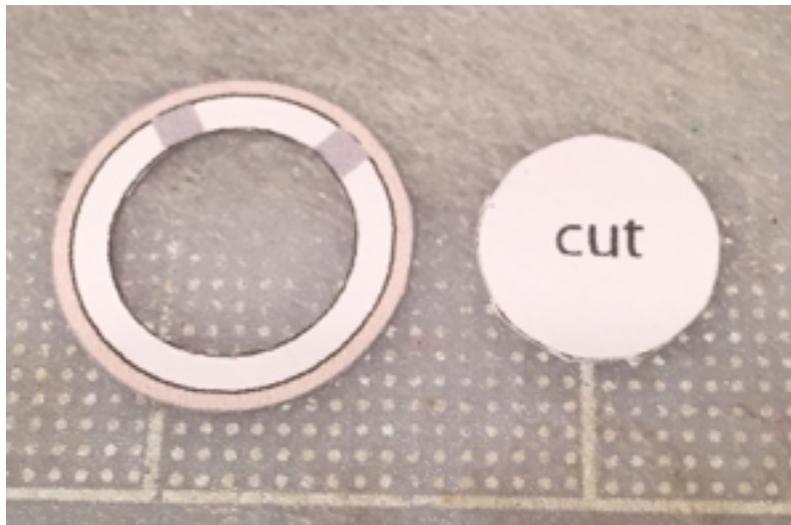




The midline handrail needs to be centered between the 2 gray shaded areas.

How to center the top


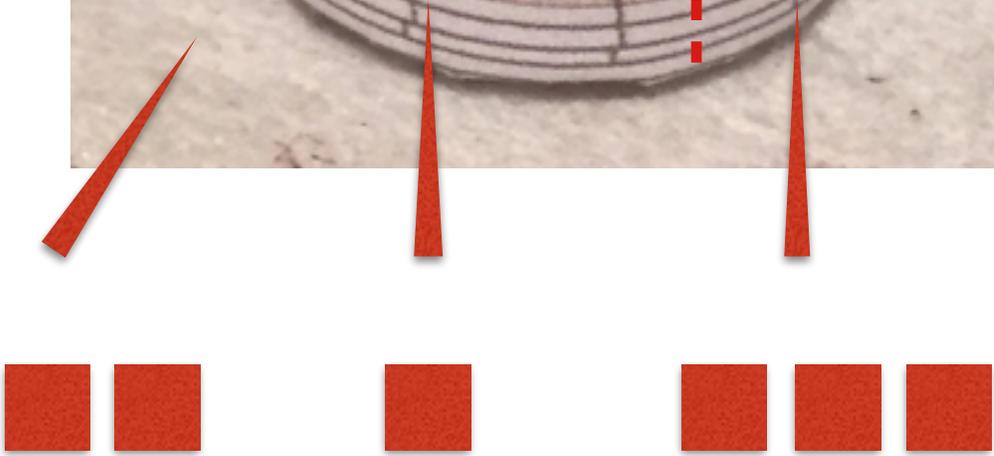
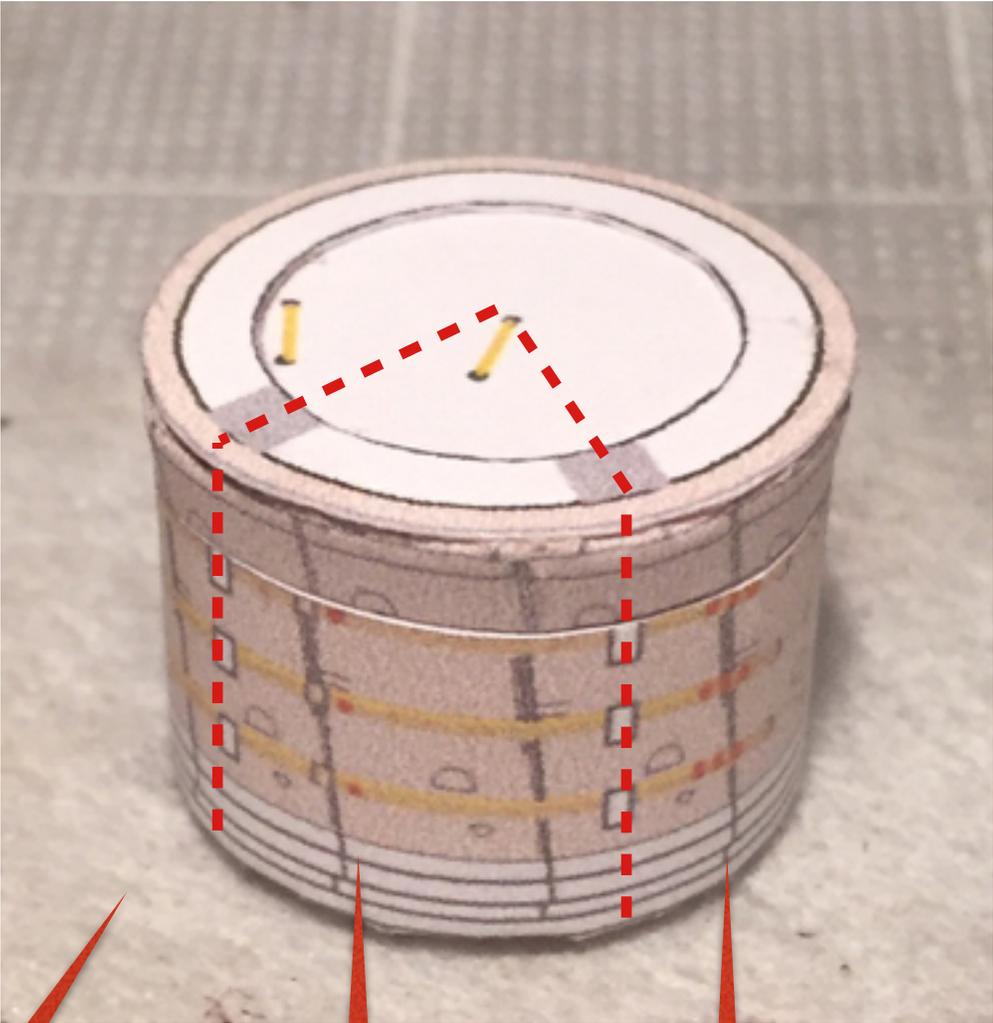



Follow the guidelines from this photo. The gray areas need to match the small white rectangles on the body of BEAM and in between it has to be the single orange square section.

Adding the docking ring

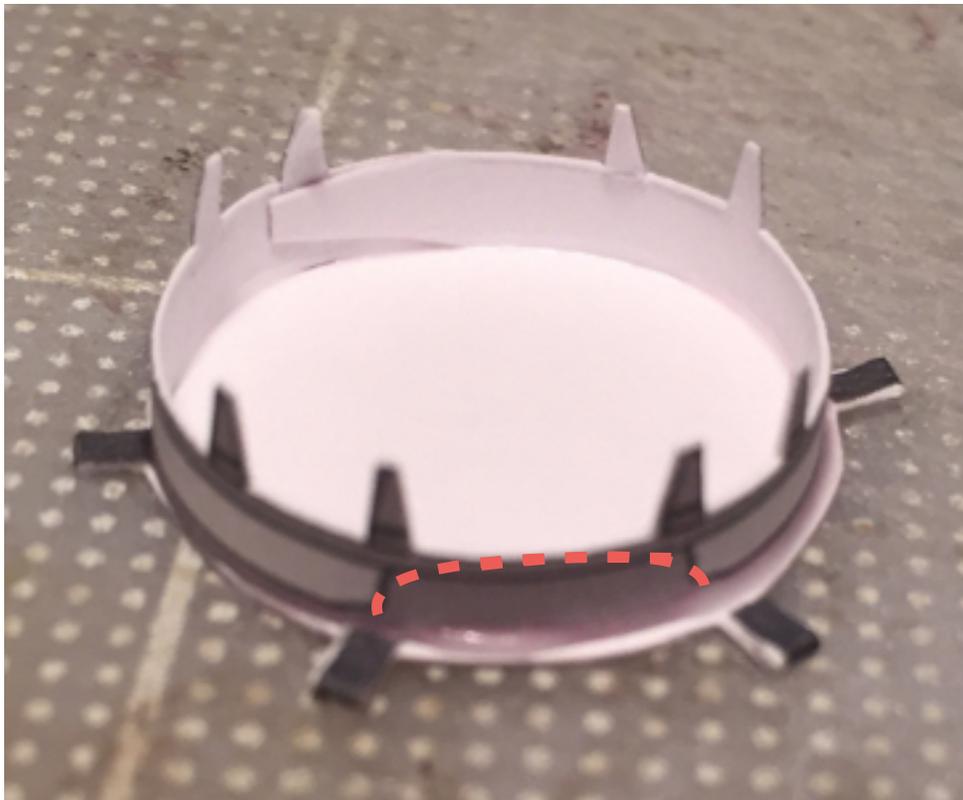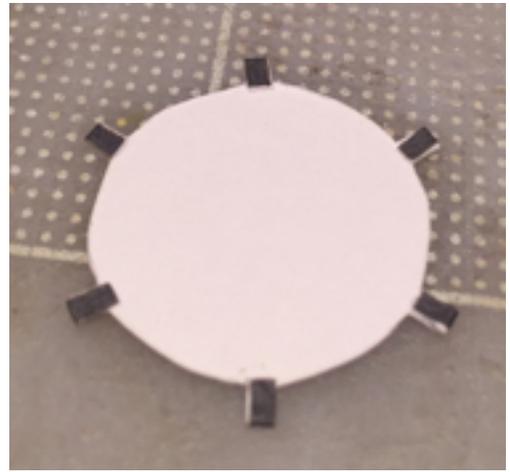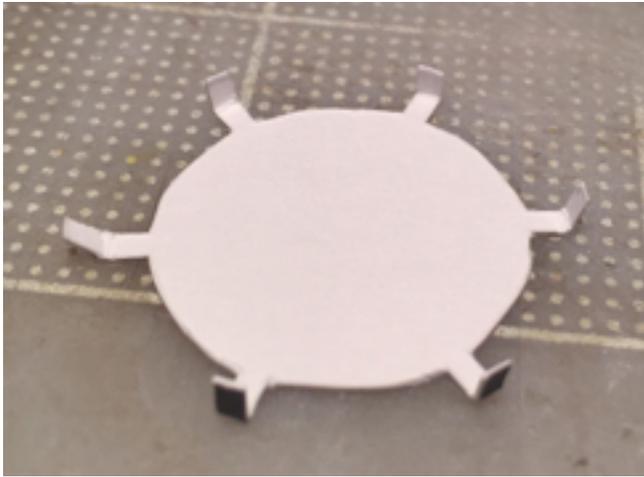


The indicated gray area needs to be in between any of the protruding black rectangles.

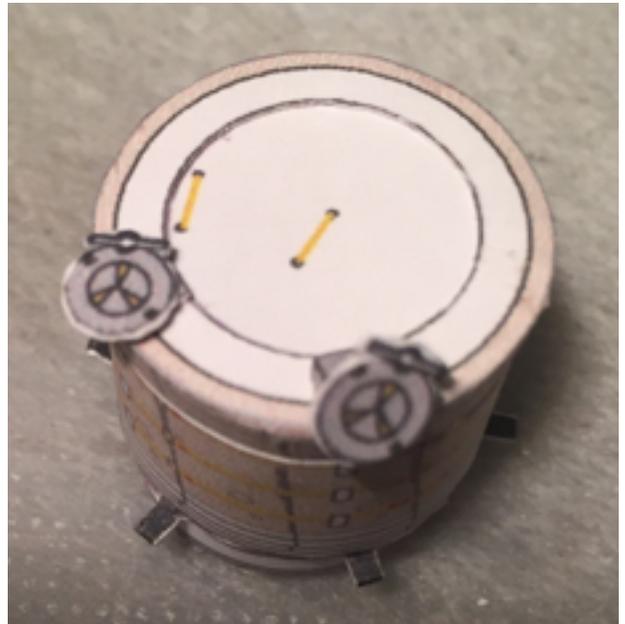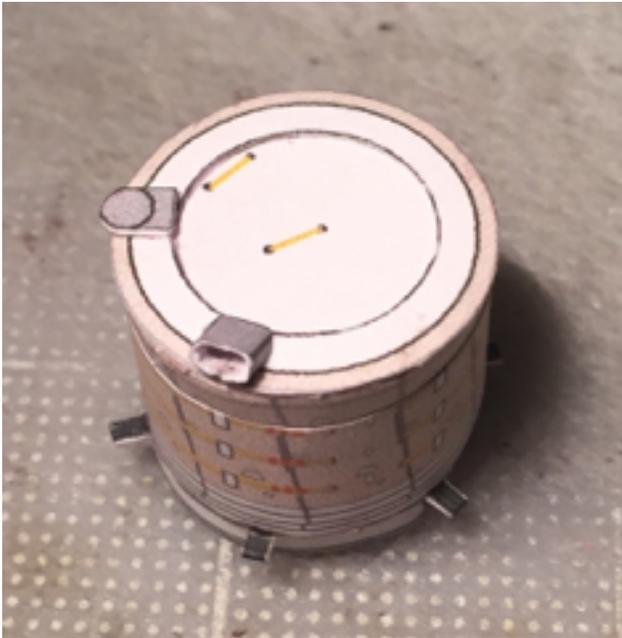
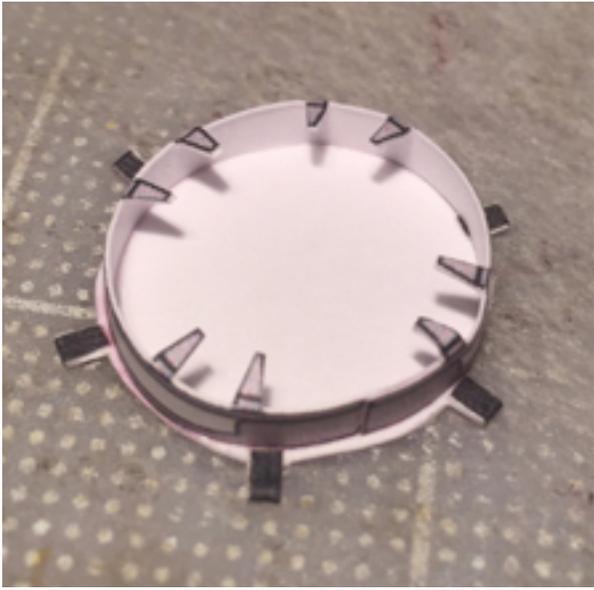


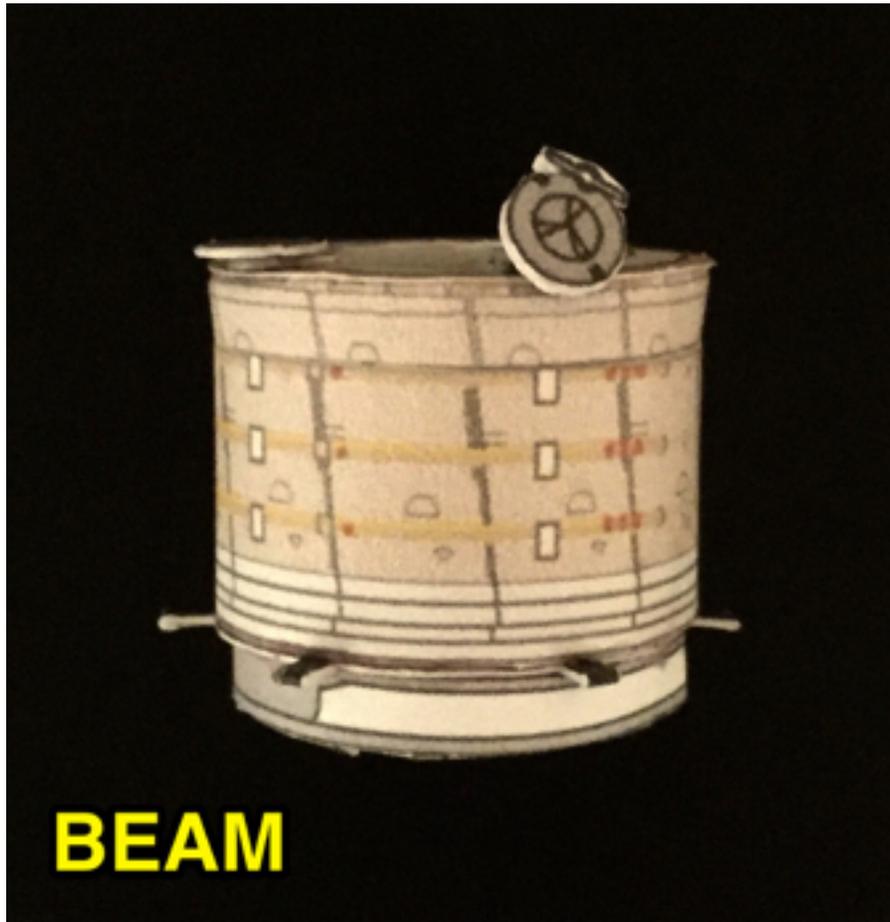



BEAM

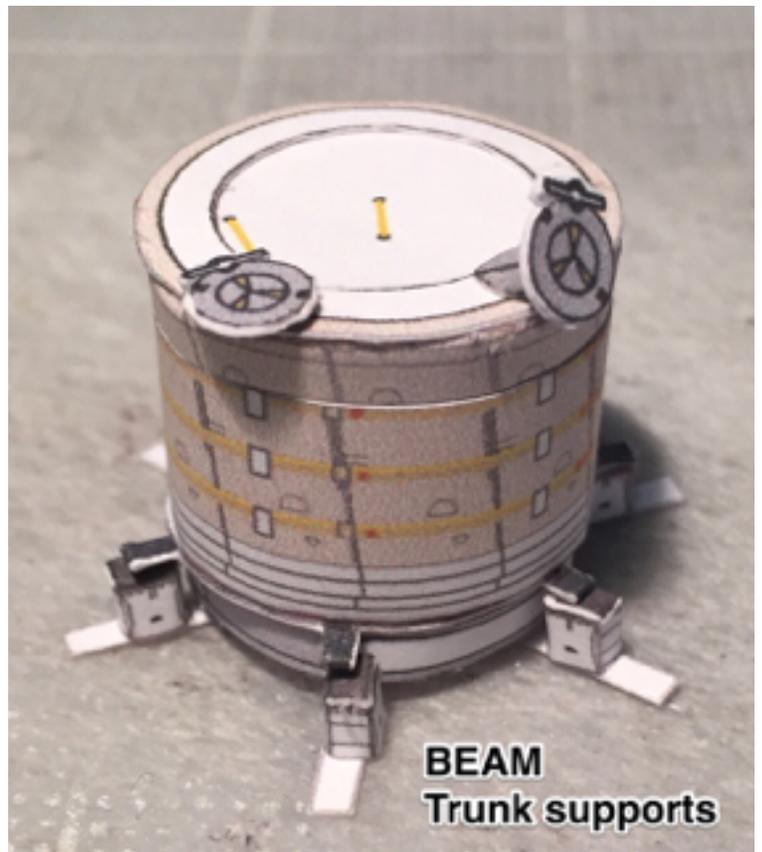

BEAM
Trunk supports

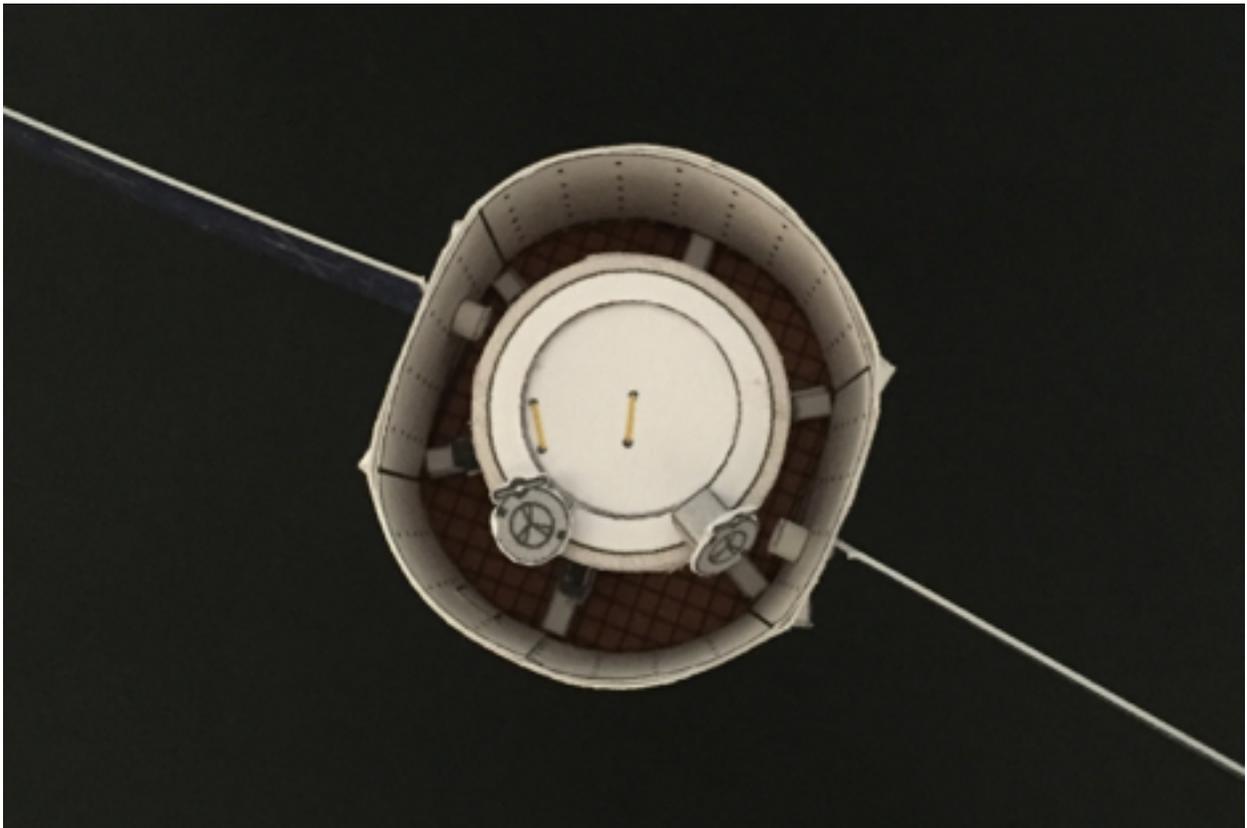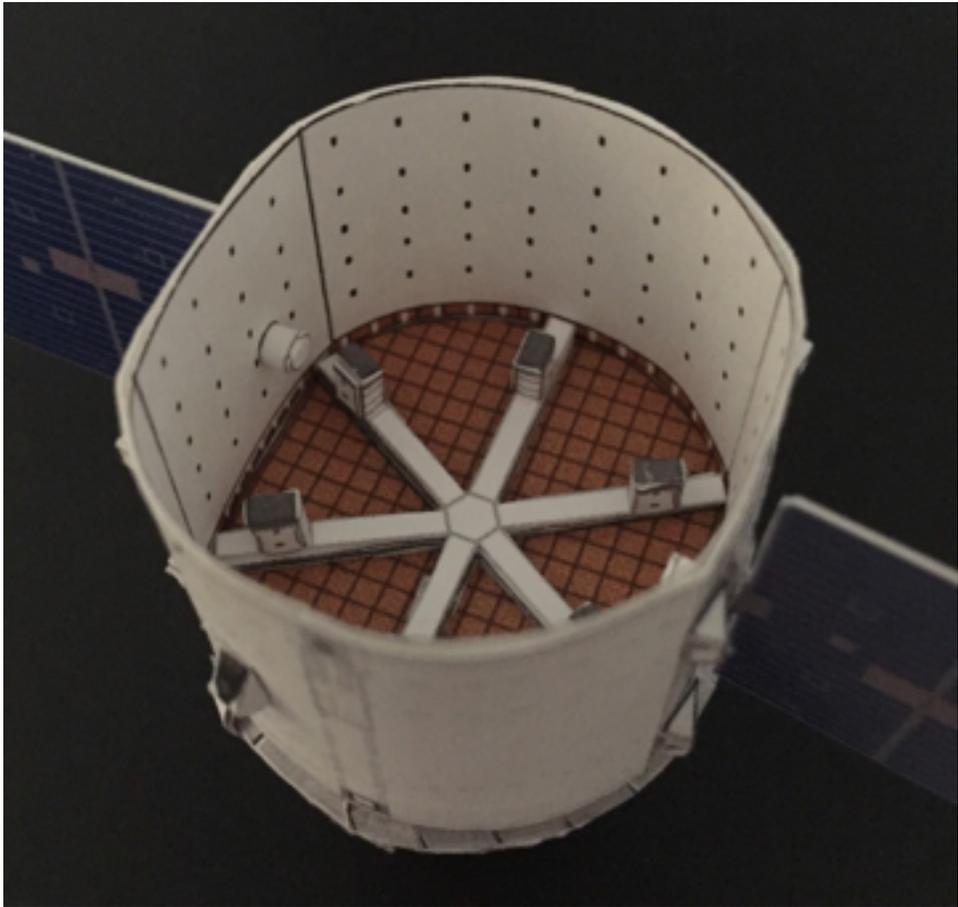

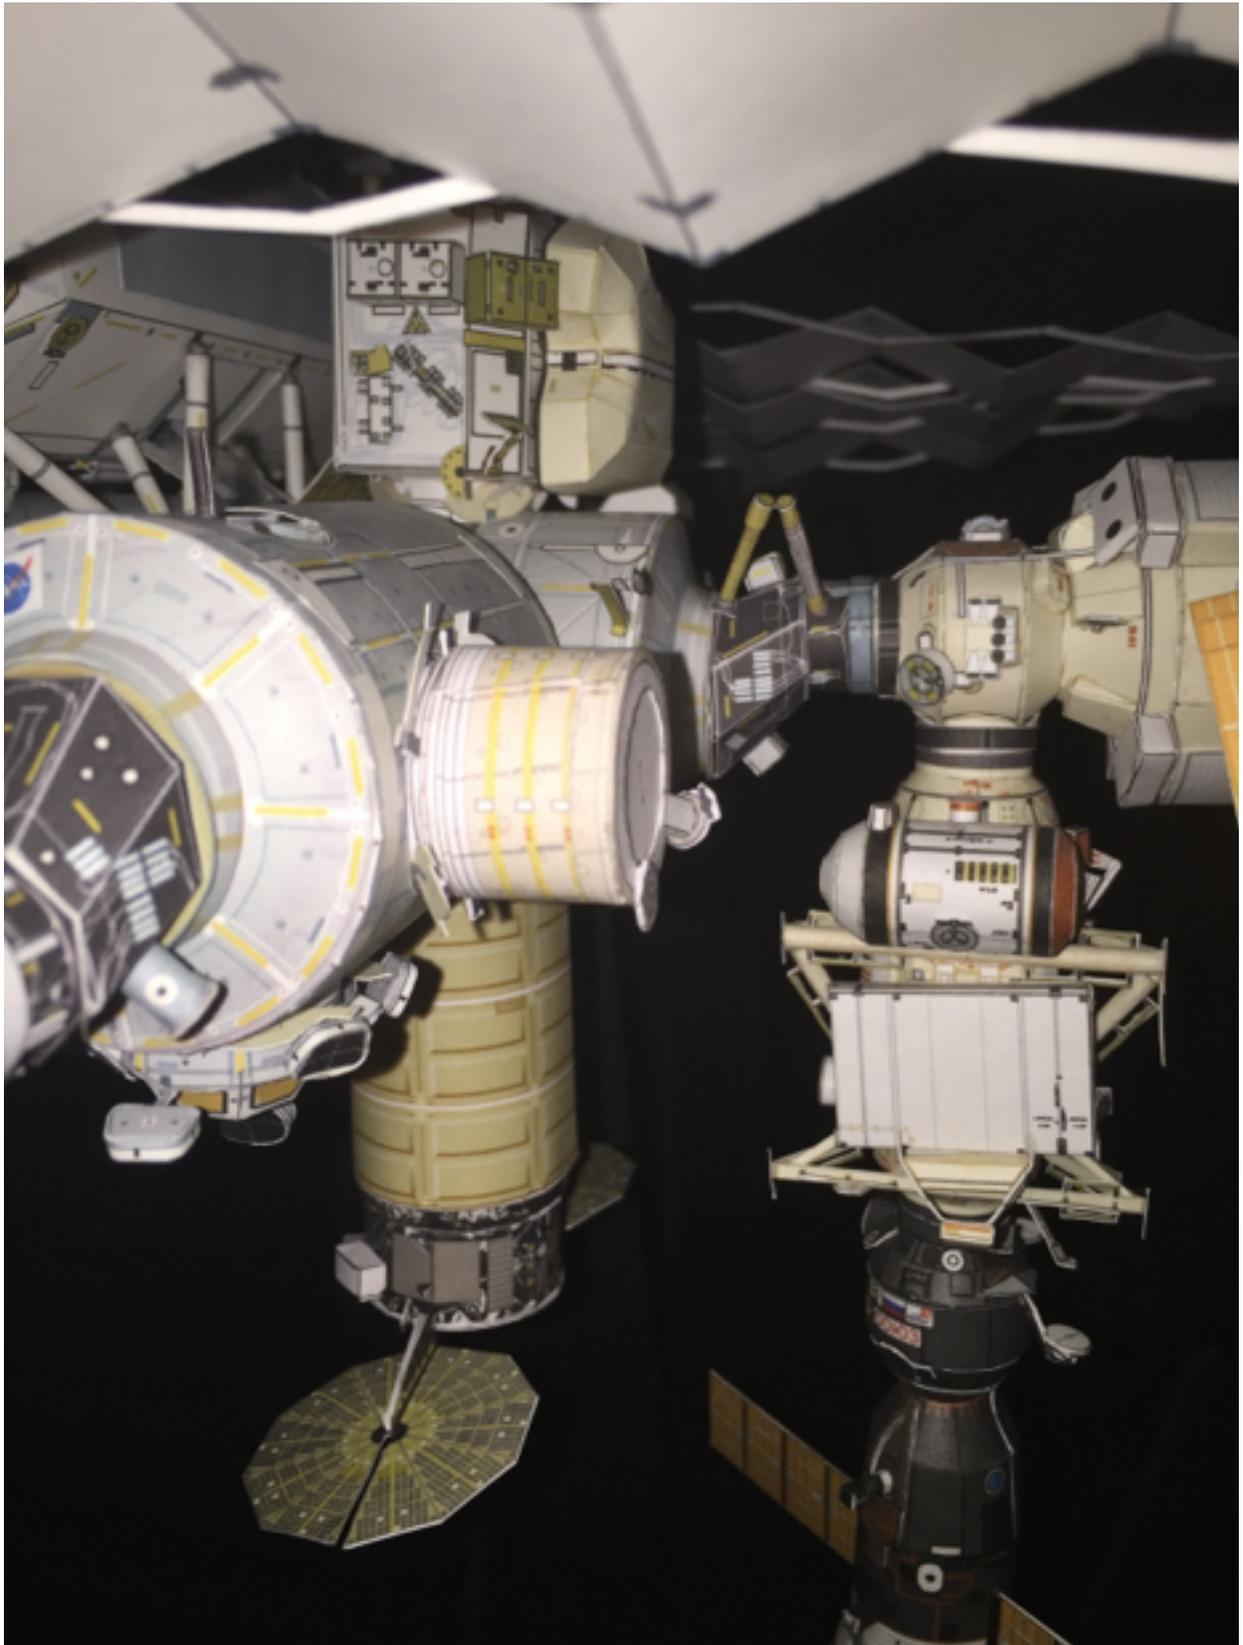

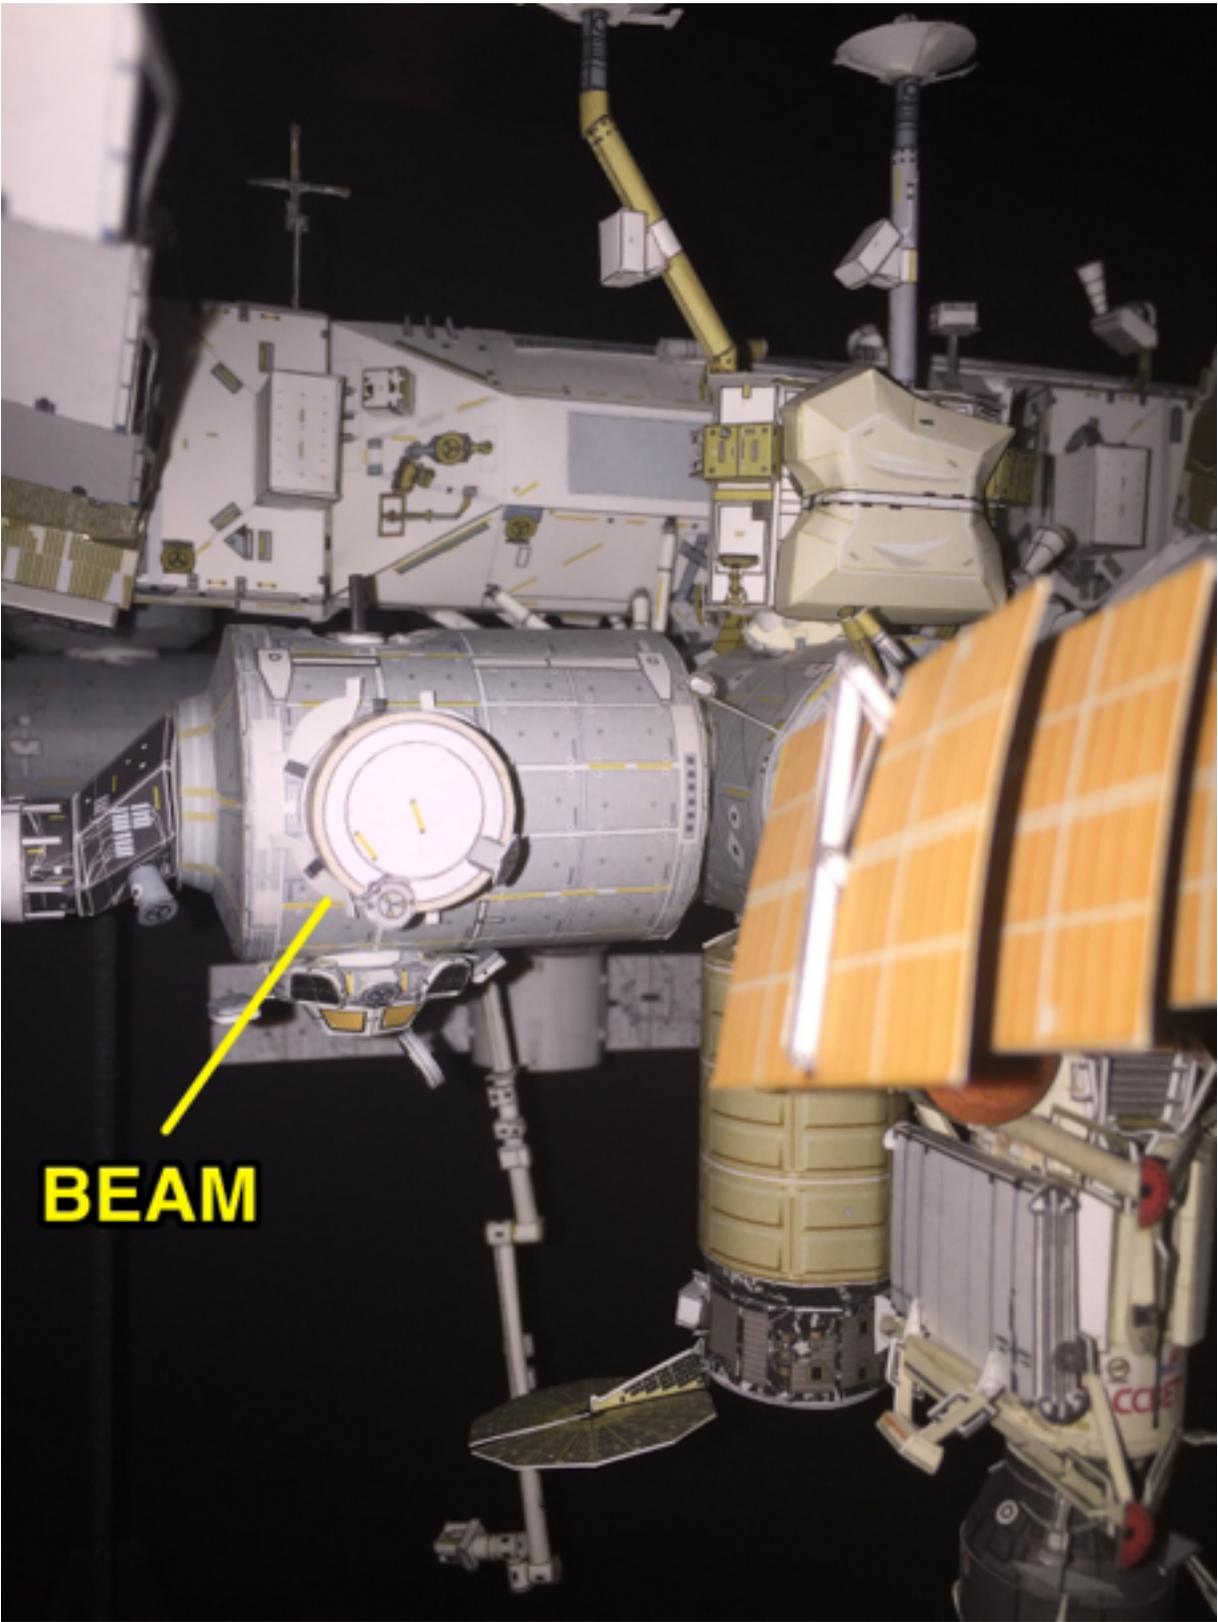

BEAM

Enjoy!!!

www.axmpaperspacescalemodels.com